


Timm Gold Winchline

12-strand mixed Polyolefin rope with Polyester cover

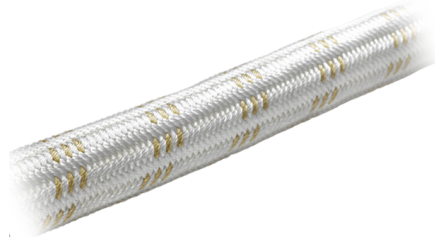

Timm Gold Winchline is an advanced rope with a strong core and a cover braid made to resist heavy abrasion and to prevent dangerous lash-back.

The compact construction and even roundness make the rope run very smoothly on winches and prevents the rope from digging into below layers. This rope is suitable for Ro-Ro vessels.

SUITABLE



Mooring

PRODUCT FEATURES

Construction	12-strand plaited core 24 or 32 braided cover
Fiber	B5 (mixed polyolefin) - optional PES cover
Specific gravity	0,99
Colours	White
UV resistance	Excelent
Abbrasion resistance	Excelent
Water resistance	< 0,1% absorption
Heat resistance	165-260°
Elongation	18% at break
Colours polyester cover	White with 3 gold tracer

KEY BENEFITS

- Cover braided construction: core of SIGNAL B5 mixed polyolefin yarn covered with high performance Polyester
- High abrasion resistance
- Buoyant
- UV stabilized
- OCIMF approved product
- Class leading strength-to-weight ratio

CERTIFICATE



diameter	MBL spliced	MBL spliced	MBL unspliced	MBL unspliced	diameter	MBL spliced	MBL unspliced	Weight
DIA. (mm)	(t)	(kN)	(t)	(kN)	DIA. (inch)	(lbs)	(lbs)	(kg/m)
40	31.2	306	34.7	340	1.5/8"	68.791	76.435	1.094
44	37.4	367	41.7	409	1.3/4"	82.752	91.947	1.292
48	44.4	435	49.4	484	2"	97.927	108.807	1.503
52	51.9	509	57.7	566	2.1/8"	114.517	127.242	1.727
56	60	588	66.7	654	2.1/4"	132.322	147.025	1.965
60	68.5	672	76.2	747	2.1/2"	151.139	167.932	2.216
64	77.7	762	86.4	847	2.5/8"	171.371	190.413	2.479
68	87.5	858	97.3	954	2.3/4"	193.020	214.467	2.754
70	92.6	908	102.9	1009	2.7/8"	204.149	226.832	2.897
72	97.8	959	108.7	1066	3"	215.681	239.646	3.042
80	120	1177	133.4	1308	3.1/4"	264.644	294.049	3.654
88	144.5	1417	160.6	1575	3.5/8"	318.663	354.070	4.314