


Timm Gold Winchline

12-strand mixed Polyolefin rope with Polyester cover

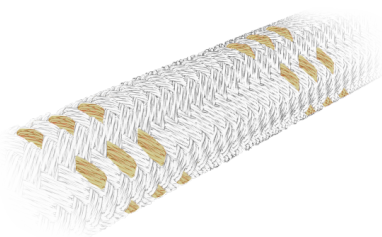

Timm Gold Winchline is an advanced rope with a strong core and a cover braid made to resist heavy abrasion and to prevent dangerous lash-back.

The compact construction and even roundness make the rope run very smoothly on winches and prevents the rope from digging into below layers. This rope is suitable for Ro-Ro vessels.

SUITABLE



Mooring

PRODUCT FEATURES

Construction	12-strand plaited core 24 or 32 braided cover
Fiber	B5 (mixed polyolefin) - optional PES cover
Specific gravity	0,99
Colours	White
UV resistance	Excelent
Abbrasion resistance	Excelent
Water resistance	< 0,1% absorption
Heat resistance	165-260°
Elongation	18% at break
Colours polyester cover	White with 3 gold tracer

KEY BENEFITS

- Cover braided construction: core of SIGNAL B5 mixed polyolefin yarn covered with high performance Polyester
- High abrasion resistance
- Buoyant
- UV stabilized
- OCIMF approved product
- Class leading strength-to-weight ratio

CERTIFICATE



diameter DIA. (mm)	MBL spliced (t)	MBL spliced (kN)	MBL unspliced (t)	MBL unspliced (kN)	diameter DIA. (inch)	MBL spliced (lbs)	MBL unspliced (lbs)
40	31.2	306	34.7	340	1.5/8"	68.791	76.435
44	37.4	367	41.7	409	1.3/4"	82.752	91.947
48	44.4	435	49.4	484	2"	97.927	108.807
52	51.9	509	57.7	566	2.1/8"	114.517	127.242
56	60	588	66.7	654	2.1/4"	132.322	147.025
60	68.5	672	76.2	747	2.1/2"	151.139	167.932
64	77.7	762	86.4	847	2.5/8"	171.371	190.413
68	87.5	858	97.3	954	2.3/4"	193.020	214.467
70	92.6	908	102.9	1009	2.7/8"	204.149	226.832
72	97.8	959	108.7	1066	3"	215.681	239.646
80	120	1177	133.4	1308	3.1/4"	264.644	294.049
88	144.5	1417	160.6	1575	3.5/8"	318.663	354.070